flexx II 36 U / 24 U / 12 U / 6 U / 3 U



proxSafe[®]

Key Management & Smart Storage Systems

The intelligent management system for keys and equipment with comprehensive audit and reporting capabilities. Control who can have access to individual items and restrict when they can be taken. Keys, radios, test equipment, tools, laptops and much more can now be managed efficiently with increased accountability so you know where they are and who has them. The powerful software Commander Connect allows easy configuration and control of access rights, time profiles and the creation of individual reports. That way you stay in control at all times and make the best use of your equipment.

Modular key cabinets with up to 384 slots


proxSafe flexx is a modular solution, allowing you to create any system size for your own perfect solution by combining various types of housings and keyPanels. Any size system from 16 slots to thousands with numerous configurations can be realized.

proxSafe flexx systems consist of robust steel cabinets in a discreet color. The keyPanels with various slot densities are site-assembled into the cabinets. If you need to store a high quantity of single keys you can choose key panels with a high slot density, for large bunches of keys or other items a low slot density is better suited. Configuration of the proxSafe flexx system can be modified at any time in order to meet changed requirements. The doors can be constructed of solid panels or with clear window panes.

Smaller cabinets are designed for hanging installation, while the 36 U cabinet can be placed perfectly in combination with compartment systems due to its design. In any flexx-steel cabinet, a power supply, the battery and the electronic control of all connectable components is included. The built-in power-saving mode ensures optimal use of the battery. The terminal and the various keyPanels can be simply connected to the control board in the flexx housing which was designed to make retrofitting very easy. An additional service door allows easy access to all components, as well as emergency opening of the corresponding proxCylinder. All proxSafe housings are equipped with tamper contacts and 4 relays which can indicate various alarms via the network and locally.

Your benefits at a glance:

- Power save mode for very long operation with backup battery
- Fail-safe open
- Contactless technology, maintenance-free
- Convenient emergency opening
- System always extendable with additional panels
- 4 outputs for local alarms

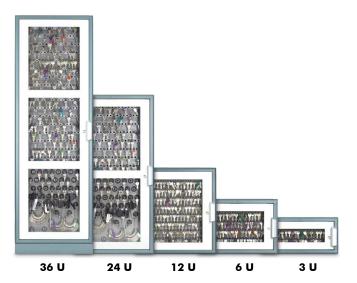

Technical Data

Dimensions WxHxD /

Weight:	
36 U	

36 U 24 U 12 U 6 U 3 U	630 x 1920 x 210 mm / 70 kg 630 x 1252 x 210 mm / 60 kg 630 x 666 x 210 mm / 26 kg 630 x 432 x 210 mm / 20 kg 630 x 299 x 210 mm / 15 kg
Material:	stainless steel, powder coated
Sheet thickness: Housing Door	1,5 mm 2,5 mm
Colour:	similar RAL 9006, DB502
Operating Temperature:	+5+50 °C
Relative Humidity:	595 %, non-condensing
Power Requirement:	110240 VAC
keyTag Frequency:	125 kHz
Door Options:	Metal door, not shown Metal door with window
Backup Battery:	12 VDC / 2.3 Ah
Digital Output:	4x 30 VDC / 1 A for up to 16 Alarms

100

1000

010

/ 70 /